



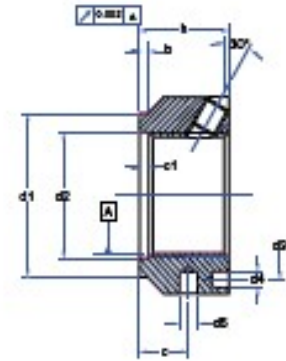

TMF Series—30° Locking

- Material—AISI 4140
- Hardness—HRC 28-32
- Precision—ISO 4H



Part Number	Dimensions in mm										Locking Screws				
	D _T	P	D	h	d ₁	d ₂	d ₃	d ₄	d ₅	b	c	c ₁	DIN	Max Tightening Torque (T) N-m	Allowable Axial Load (C _A) kN
TMF 25x1.5	42	20	35	26	32.5	4.3	4	2	11	2	M6	8	130	45	
TMF 30x1.5	48	20	40	32	40.5	4.3	5	2	11	2	M6	8	160	55	
TMF 35x1.5	53	20	47	38	45.5	4.3	5	2	11	2	M6	8	190	65	
TMF 40x1.5	58	22	52	42	50.5	4.3	5	2	12	2	M6	8	210	80	
TMF 45x1.5	68	22	58	48	58	4.3	6	2	12	2	M6	8	240	95	
TMF 50x1.5	70	24	63	52	61.5	4.3	6	2	13	2	M6	8	300	115	
TMF 55x1.5	75	24	70	58	66.5	4.3	6	3	13	3	M6	8	340	135	
TMF 60x1.5	84	24	75	62	74.5	5.3	6	3	13	3	M6	8	380	150	
TMF 65x1.5	88	25	80	68	78.5	5.3	6	3	13	3	M6	8	460	170	
TMF 70x1.5	95	26	86	72	85	5.3	8	3	14	3	M8	18.6	490	285	
TMF 75x1.5	100	26	91	77	88	6.4	8	3	15	3	M8	18.6	520	305	
TMF 80x2	110	30	97	83	95	6.4	8	3	16	3	M8	18.6	620	325	
TMF 85x2	115	32	102	88	100	6.4	8	3	17	3	M10	35	650	660	
TMF 90x2	120	32	110	93	108	6.4	8	3	17	3	M10	35	680	720	
TMF 95x2	125	32	114	98	113	6.4	8	3	17	3	M10	35	710	780	
TMF 100x2	130	32	120	103	118	6.4	8	3	17	3	M10	35	740	840	
TMF 110x2	140	32	132	112	128	6.4	8	3	17	3	M10	35	800	960	
TMF 120x2	155	32	142	122	140	6.4	8	3	17	3	M10	35	860	1080	
TMF 130x2	165	32	156	132	153	6.4	8	3	17	3	M10	35	920	1200	
TMF 140x3	180	32	166	142	165	6.4	10	3	17	3	M10	35	980	1320	
TMF 150x3	190	32	180	152	175	6.4	10	5	17	5	M10	35	1040	1440	
TMF 160x3	205	32	190	162	185	8.4	10	5	17	5	M10	35	1100	1600	
TMF 170x3	215	32	205	172	195	8.4	10	5	17	5	M10	35	1160	1750	
TMF 180x3	230	32	215	182	210	8.4	10	5	17	5	M10	35	1220	1900	
TMF 190x3	240	32	225	192	224	8.4	10	5	17	5	M10	35	1280	2050	
TMF 200x3	245	32	237	202	229	8.4	10	5	17	5	M10	35	1340	2200	

When ordering the above products, please refer to the HOW TO ORDER section on page 5.

The specifications and data in this publication are believed to be accurate and reliable. However, it is the responsibility of the product user to determine the suitability of Nook Industries products for a specific application. While defective products will be replaced without charge if promptly returned, no liability is assumed beyond such replacement.